


HPLC Syringes

Most Common Valves

Rheodyne, Varian, Shimadzu, Knauer, Hewlett Packard/Agilent, Beckmann, Valco VISF-2 and Altex Valve Injectors

Manufactured by ILS

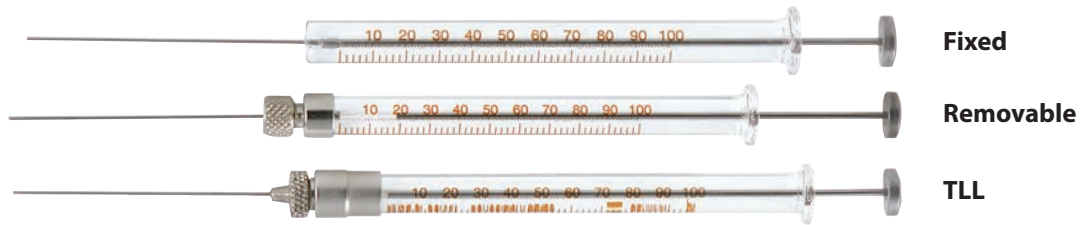

Volume Scale May Vary

Plunger:	Flexible Plunger Special Stainless Steel Plunger Special Stainless Steel Plunger with PTFE-Seal
Glass Barrel:	Borosilicate 3.3
Precision:	< ±1% of the volume

Physical and Chemical Properties of Glass

Coefficient of mean linear thermal expansion α (20°C; 300°C) acc. to ISO 7991		$3.3 \cdot 10^{-6} \text{ K}^{-1}$
Transformation temperature T_g		525°C
Glass temperature at viscosity η in $\text{dPa} \cdot \text{s}$:	10^{13} (annealing point)	560°C
	$10^{7.6}$ (softening point)	852°C
	10^4 (working point)	1260°C
Maximum short-time working temperature		500°C
Density ρ at 25°C		$2.23 \text{ g} \cdot \text{cm}^{-3}$
Modulus of elasticity E (Young's modulus)		$64 \cdot 10^3 \text{ N} \cdot \text{mm}^{-2}$
Poisson's ratio μ		0.20
Thermal conductivity λ_w at 90°C		$1.2 \text{ W} \cdot \text{m}^{-1} \cdot \text{K}^{-1}$
Temperature for the specific electrical resistance of $10^8 \Omega \cdot \text{cm}$ (DIN 52326) t_{k100}		250°C
Logarithm of the electric volume resistivity ($\Omega \cdot \text{cm}$)	at 250°C	8
	at 350°C	6.5
Dielectric properties (1 MHz, 25°C)		
Dielectric constant (permittivity) ϵ		4.6
Dielectric loss factor (dissipation factor) $\tan \delta$		$37 \cdot 10^{-4}$
Refractive index ($\lambda = 587.6 \text{ nm}$) n_d		1.473
Stress-optical coefficient (DIN 52314) k		$4.0 \cdot 10^{-6} \text{ mm}^2 \cdot \text{N}^{-1}$

Reference: Schott Duran®