



Hand-Held Series

Models HH120D, HH120 and HH320




Convenient, compact and portable weighing capability in the palm of your hand! These little scales with sleek styling and convenient size are ideal to take anywhere—throw it in a brief case or drop it in a backpack. Whether you choose the HH120D model with basic grams weighing or the HH120 and HH320 models with multiple weighing units, the Ohaus Hand-Held series offers outstanding performance and exceptional value.

- Unique hand-held design
- Energy-saving auto shut-off feature
- Protective snap on cover for storage and transport
- Large high contrast display
- Backlit display on HH120 and HH320 models
- Rugged plastic construction

Hand-Held Series *Portable Scales*

Specifications

| | | | |
|-------------------------------|-------------------------------------|-----------|-----------|
| Capacity x Readability (g) | 0-60 x 0.1 60-120 x 0.2 | 120 x 0.1 | 320 x 0.1 |
| Linearity (g) | 0 - 60g: ±0.1 60 - 120g: ±0.2 | ±0.1 | ±0.2 |
| Weighing units | g, oz, dwt, oz t | | |
| Zero range | To capacity by subtraction | | |
| Calibration | User calibration | | |
| Stabilization time | 3 seconds | | |
| Maximum overload | 150% of capacity | | |
| Auto shut-off | 5 minutes no activity | | |
| Optimum operating temperature | 64°-77°F / 18°-25°C | | |
| Display (in/mm) | LCD (0.4/11) | | |
| Weigh pan size L x W (in/cm) | 3.25 x 3.0 / 8.3 x 7.6 | | |
| Power requirements | 2-AAA alkaline batteries (included) | | |
| Dimensions L x W x H (in/cm) | 5.35 x 3.25 x 0.8/13.6 x 8.3 x 2.0 | | |
| Net Weight (lb/kg) | .34 / .16 | | |
| Item Number | HH120D | HH120 | HH320 |

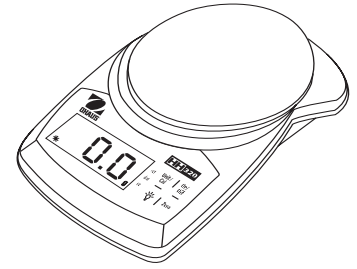

Standard Features

Low battery indicator, overload and underload indicators, 2-AAA batteries, rugged plastic construction, protective snap-on cover, easy calibration. Button activated luminescent display on HH120 and HH320.

Industry Leading Quality and Support

All Ohaus Hand-Held Scales are manufactured under an ISO 9001:2000 Registered Quality Management System. Our rugged construction and stringent quality control have been hallmarks of all Ohaus products for nearly a century.

Ohaus Corporation
 * 19A Chapin Road
 P.O. Box 2033
 Pine Brook, NJ 07058 USA

Tel: 973.377.9000
 Fax: 973.593.0359

www.ohaus.com

*With offices throughout Europe,
 Asia, and Latin America*

* ISO 9001:2000
 Registered Quality Management System

LUS03-99 REV05-01 © Copyright Ohaus Corporation

